

PROJECT NAME	
CATALOG NO.	
FIXTURE SCHEDULE	
COMMENTS	

FEATURES

These classically styled commercial post top fixtures were designed to seamlessly compliment a new or existing building while delivering the dramatic energy saving of LED. Designed with an internal driver, this type of outdoor area lighting is an ideal replacement for existing outdoor accent lighting fixtures.

- Standard Model: 60W, 3000-5700K, Black finish, Clear linear Lens
- Replaces up to 200W HID
- Internal driver
- Near Zero Maintenance
- Does not attract insects




- Voltage: 100-277VAC 50/60Hz
- THD: <15%, Power Factor: 0.98
- CRI: >70
- CCT: 3000/4000/5000/5700K
- Lens Finish: Black or Custom Color available
- Lens Material: PC
- Housing Finish: Aluminum, White
- Housing Material: Aluminum Die Casting
- Protection: IP65
- Dimming: Non-dimming
- Mounting Options: Pole mounting (fits on most poles)
- Operating Temp: -30~55°C/-22~131°F
- Lifespan (L70): 50,000 Hours
- 5-Year Limited Warranty


SPECIFICATIONS

MODEL	WATT (W)	LUMEN (LM)	LUMEN (LM/W)	TYPE	CRI	PF	VOLTAGE (V)	CCT (K)	BEAM ANGLE	IP	DIMENSION	WEIGHT
OMJ8-AL-60	60	6060	101	T3/T5	>70	≥0.98	100-277	3000, 4000, 5000, 5700	120°	65	∅380x840mm/14.96x33.07in	8kg / 17.64lb

DIMENSIONAL DRAWING (mm)

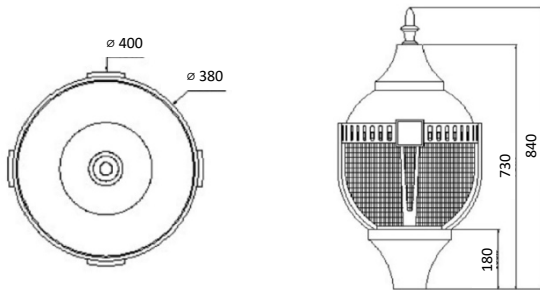

PICTURES

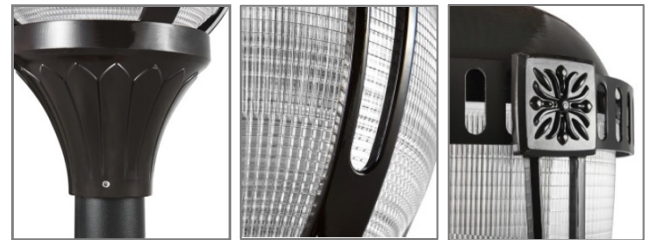


PHOTOMETRY

Angle: 125.8° Flux out: 2252.0 lm.

Luminous Intensity Distribution

	Beam Angle (50% Imax)	Field Angle (10% Imax)
C0/180	126.3	172.0
C45/225	125.7	169.2
C90/270	128.6	172.3
C135/315	122.4	168.1
AVG.	125.8	170.4

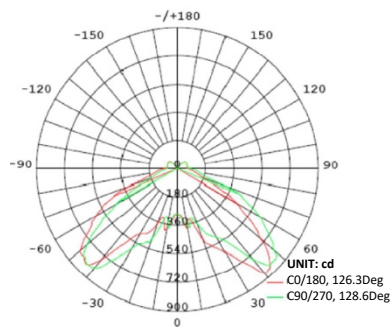

Height (ft)	Diameter (inch)	Eavg (lx)	Emax (lx)
1.64	76.77	744.4	1723
3.28	153.54	186.1	430.8
4.92	230.70	82.7	191.5
6.56	307.48	46.5	107.7
8.20	384.64	29.8	68.9
9.84	461.41	20.7	47.9
11.48	538.19	15.2	35.2
13.12	615.35	11.6	26.9
14.76	692.12	9.2	21.3
16.40	769.29	7.4	17.2

APPLICATIONS

- Outdoor parking area
- Parks
- Sidewalks
- Schools

